

TOP

Monocrystalline Silicon

PERC

Solar PV Modules

Product Feature

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

High Conversion Efficiency

Temperature Effects

Mechanical Properties


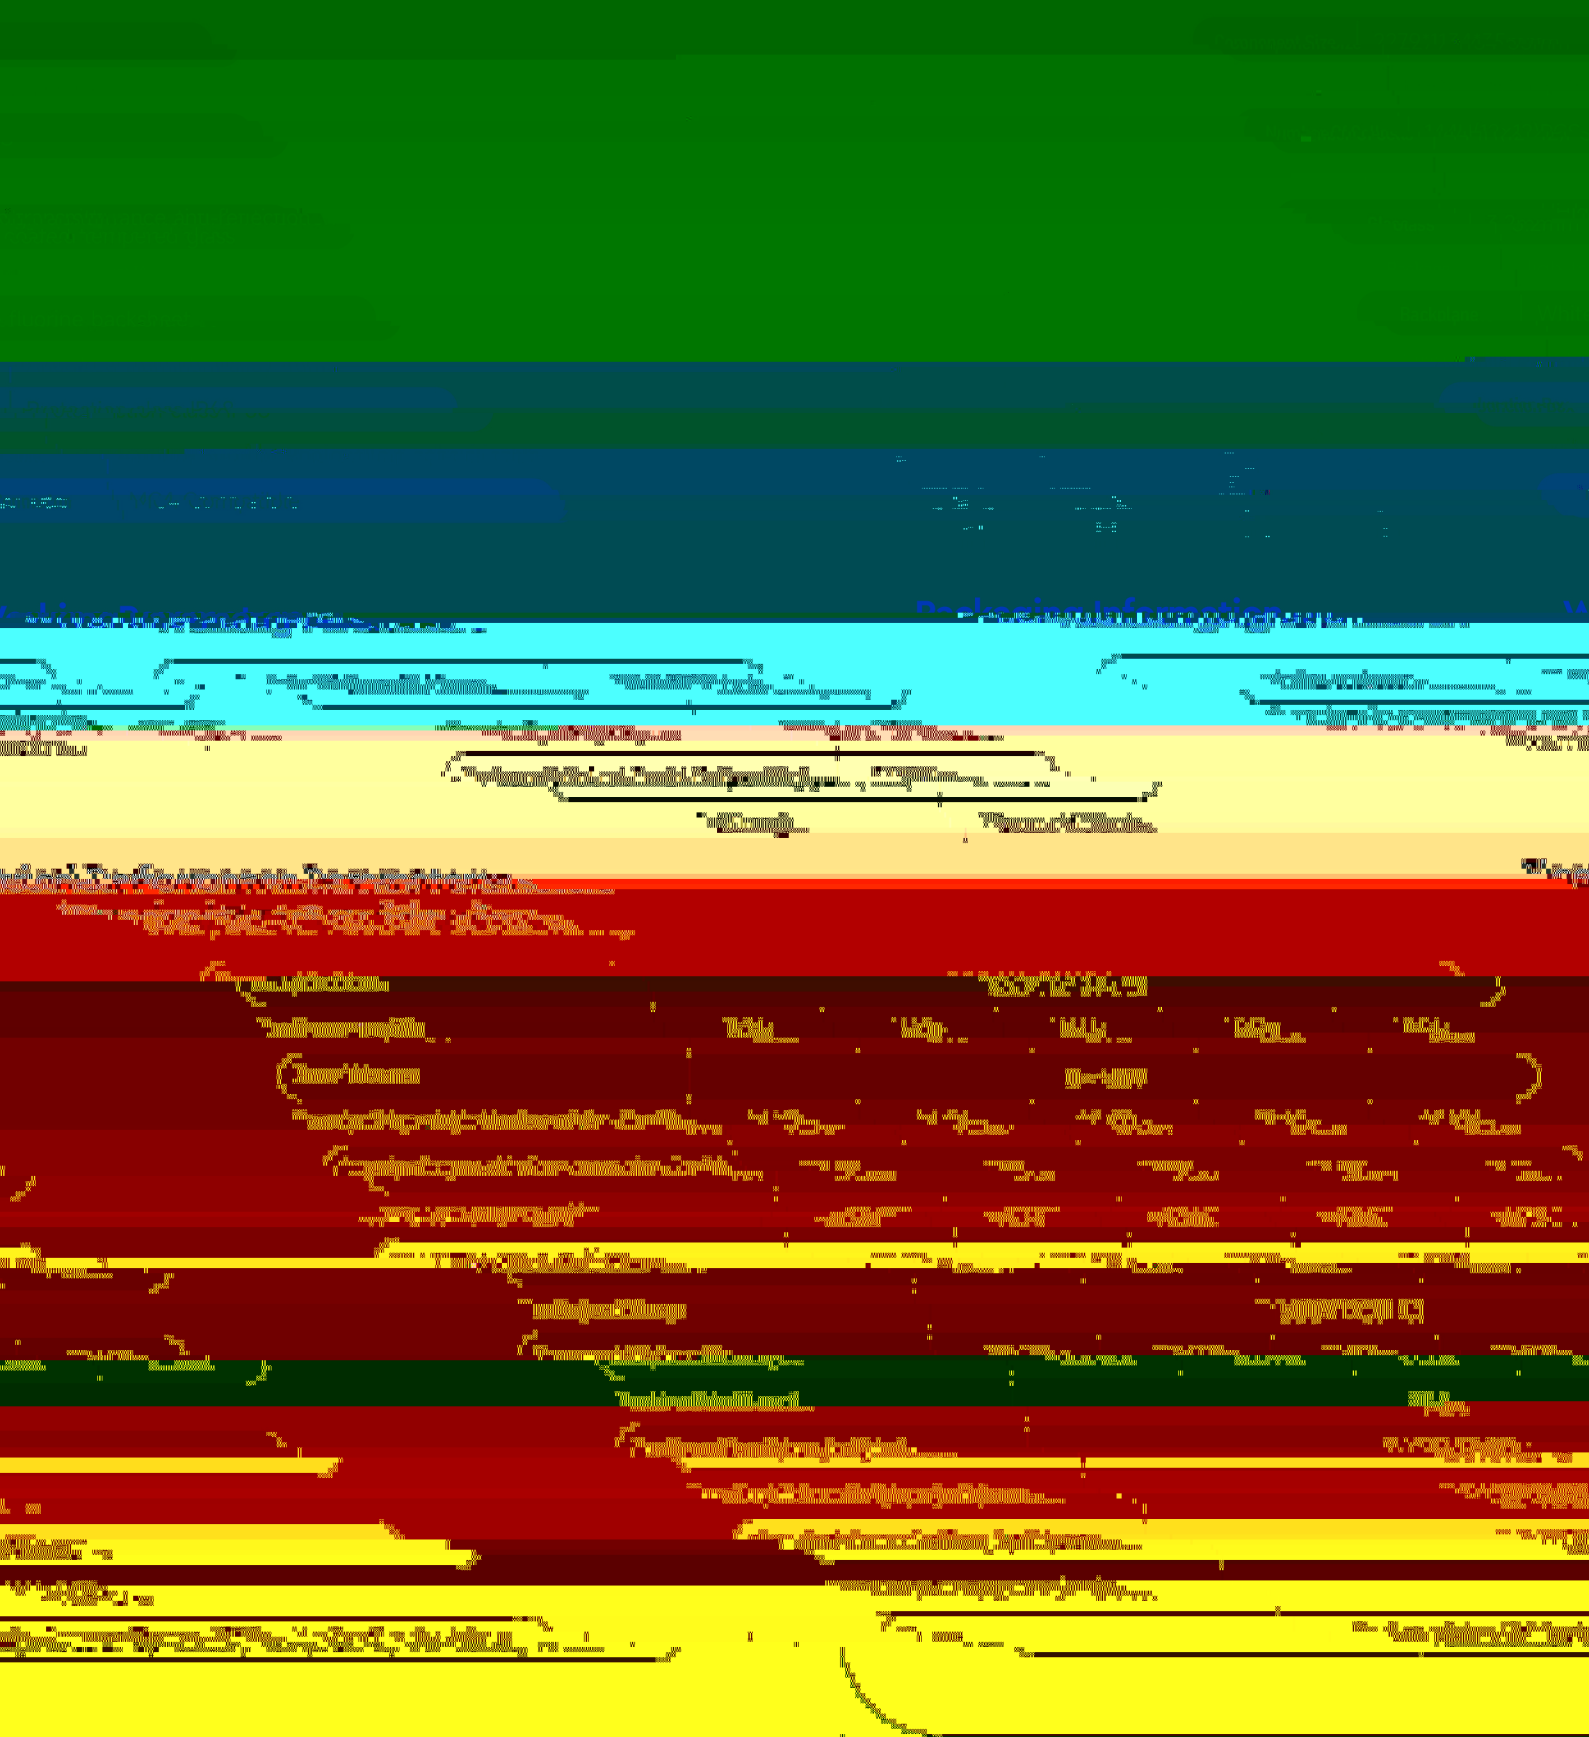


Figure 10.10: Mechanical Properties vs. Temperature. The graph shows that yield strength and tensile strength increase with temperature, while elongation decreases. The transition from BCC to FCC and HCP structures is indicated by vertical dashed lines.

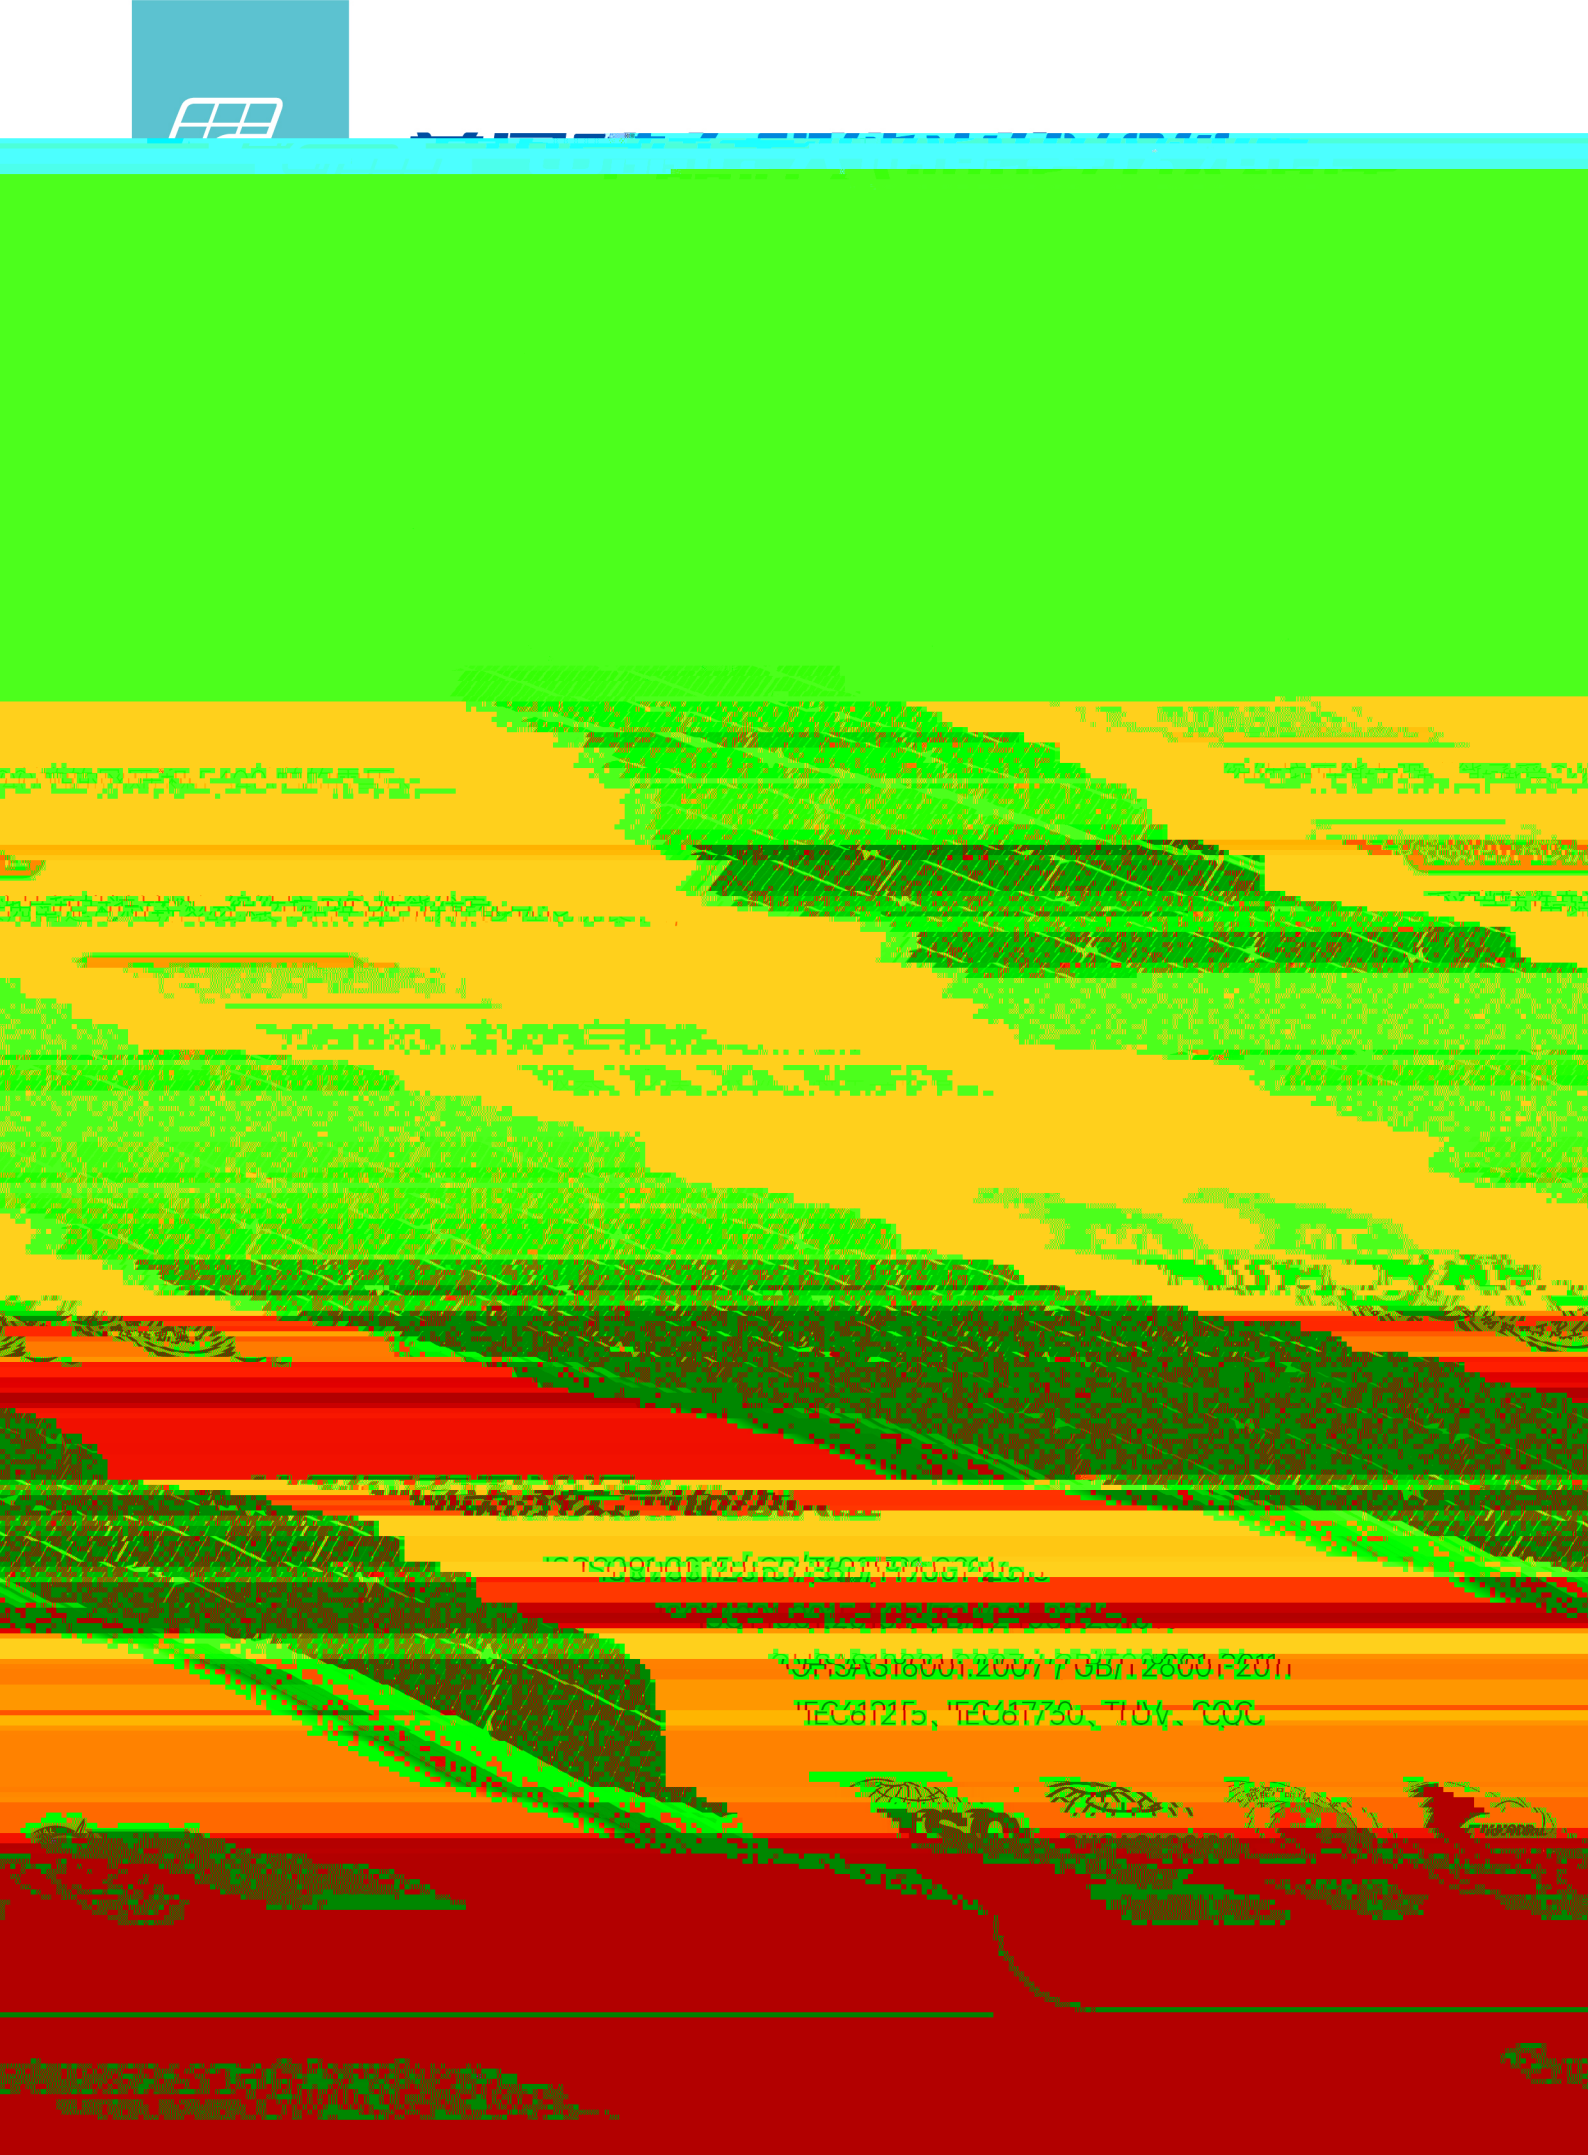

www.enel.com

ENEL GREEN POWER

TEC81215, TEC81730, T104, T80



标准尺寸: 1122/917/475mm

室内机重量: 22.2kg

12mm 高透减反射镀膜钢化玻璃

1.5米全套标配管架

标配: 400V/3N/50Hz

标配: 14.5mm x 50mm 无氟专用铜管

连接器: MC4 兼容

70件

70件

共高柜: 620mm

最大静态负载: 15kg (四管型) 或 17.5kg (3000ea)

标配: 1.5米

1.5米

1.5米

1.5米

1.5米

1.5米

1.5米

1.5米

1.5米

1.5米

1.5米


1.5米

1.5米

1.5米

1.5米

1.5米

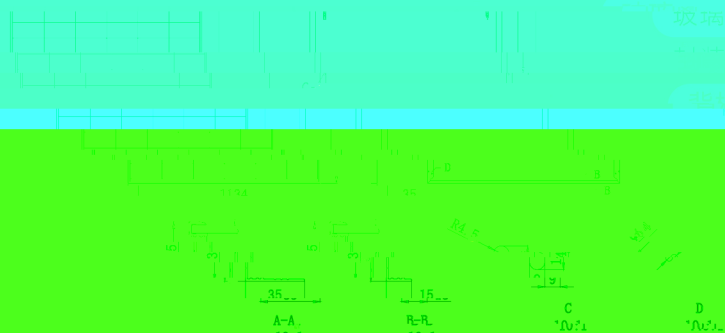

玻璃

铜管

MC4

35

15

A-A

B-B

C

D

400V/3N/50Hz 标配

400V/3N/50Hz

400V/3N/50Hz

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

25mm at 25m/s

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米

标配: 1.5米